



## HP 2600 chip instruction manual:

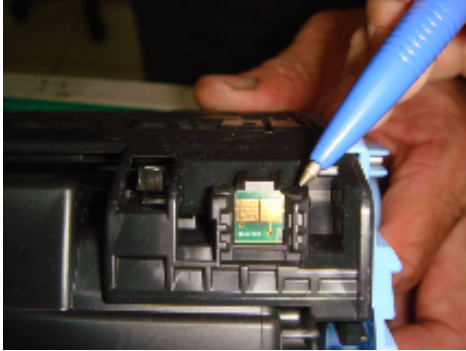


Use a screw to remove the glue

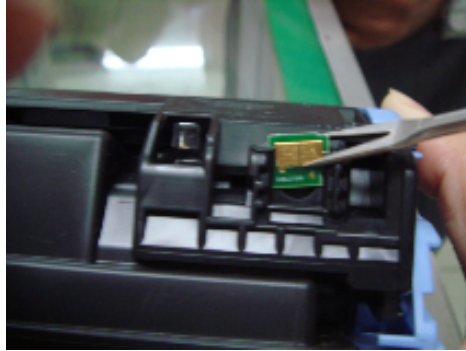

and then take out the OEM chip



Insert compatible chip

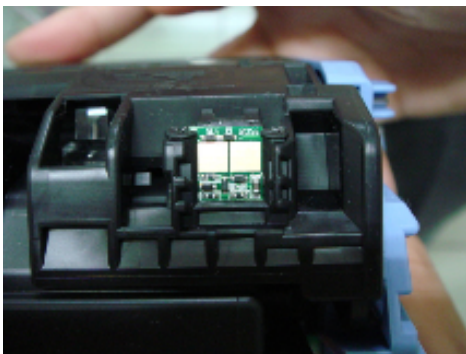

Into the bottom of chip slot



Use holt melting glue to fix the compatible chip.

For more information, contact us as below:

E-mail: [info@tonerchips.com](mailto:info@tonerchips.com)